

X-Learn: an XML-based, multi-agent system for supporting “user-device” adaptive e-learning

Pasquale De Meo¹, Alfredo Garro²,
Giorgio Terracina³, and Domenico Ursino¹

¹ DIMET, Università Mediterranea di Reggio Calabria, Via Graziella, Località Feo di Vito, 89060 Reggio Calabria, Italy,

² DEIS, Università della Calabria, Via Pietro Bucci, 87036 Rende (CS), Italy

³ Dipartimento di Matematica, Università della Calabria, Via Pietro Bucci, 87036 Rende (CS), Italy

demeo@ing.unirc.it, garro@deis.unical.it,
terracina@mat.unical.it, ursino@unirc.it

Abstract. In this paper we present *X-Learn*, an XML-based, multi-agent system for supporting “user-device” adaptive e-learning. *X-Learn* is characterized by the following features: *(i)* it is highly subjective, since it handles quite a rich and detailed user profile that plays a key role during the learning activities; *(ii)* it is dynamic and flexible, i.e., it is capable of reacting to variations of exigencies and objectives; *(iii)* it is device-adaptive, since it decides the learning objects to present to the user on the basis of the device she/he is currently exploiting; *(iv)* it is generic, i.e., it is capable of operating in a large variety of learning contexts; *(v)* it is XML based, since it exploits many facilities of XML technology for handling and exchanging information connected to e-learning activities. The paper reports also various experimental results as well as a comparison between *X-Learn* and other related e-learning management systems already presented in the literature.

1 Introduction

E-learning can be defined as the activity that supports a learning experience by either developing or applying Information & Communication Technology (ICT). It is playing a more and more relevant role in the ICT market and its importance is becoming crucial for organizing training in businesses. Indeed, market dynamism compels organizations to avoid medium-to-long term programming and to work in a project-shaped, short-to-medium term perspective.

In order to realize projects which it is involved in, an organization continuously needs new “know how” and competences; owing to the growing “skill shortage”, these can be found on the external market only with a great difficulty and a high cost. As a consequence, the capability to internally construct the necessary know how has become a must for an organization.

E-learning is a particularly suitable solution to these exigencies. More specifically, an e-learning platform should initially determine the competence gap of

the human resources assigned to a project; after this, it should fill such a gap by constructing suitable personalized and flexible learning programs that can be dynamically adapted to the feedback received by the user.

In such a context, in order to guarantee the maximum flexibility and, contemporarily, the highest efficiency to e-learning activities, it has been proposed to organize learning contents into independent units, named *learning objects*, that can be dynamically combined for constructing personalized learning programs. In order to successfully perform such an activity, an efficient and effective organization of available learning objects appears crucial. In other words, it appears necessary to define and construct a meta-knowledge that allows to classify available learning objects (documents, slides, simulations, role games, questionnaires, tests, registered lessons, etc.) on the basis of their objectives, arguments, exploited media and so on.

In order to both simplify learning object exploitation and foster platform interoperability, important international organizations have proposed to associate suitable descriptors, named LOM (Learning Object Metadata), with learning objects [2]. LOM allow information about learning objects to be obtained without the necessity to directly analyze them. More specifically, the Instruction Management System (IMS) [3], an authoritative organism for LOM standardization, has proposed to describe learning objects by means of an XML document which a suitable XML Schema is associated with. Such a proposal has been favourably accepted by the e-learning community and, presently, almost all commercial e-learning platforms support it.

LOM paradigm has largely facilitated e-learning activities, in particular the automatic construction of learning programs. However, in order to improve the efficiency and the effectiveness of e-learning activities, some important problems, often involving research areas quite far from computer science, should be faced. As an example, new didactic methodologies, based on the learning object paradigm and well suited to automatically realize learning programs, should be defined [14]. In addition, a continuous and pervasive e-learning activity should carefully consider and support the different devices that users might exploit during their learning process. With regard to this, it is worth observing that, in the Personal Digital Assistant era, limiting users to perform e-learning activities only by a Personal Computer connected to the organization's LAN unjustifiably reduces the flexibility and, consequently, both the efficiency and the effectiveness of the e-learning process.

In our opinion, some of these challenging issues can be successfully faced by exploiting the agent technology. The present paper aims at showing the feasibility of this idea; in particular, it presents *X-Learn*, an XML-based Multi-Agent System for supporting "user-device adaptive" e-learning. More specifically, X-Learn has been conceived for assisting users to learn new "know how" and competences to fill the gap between their present knowledge and that required by a new project which they have been assigned to.

In *X-Learn* user assistance is guaranteed by constructing personalized, flexible and dynamic learning programs taking into account the background knowl-

edge of a user, her/his didactic objectives as well as devices and connection typologies she/he intends to exploit for carrying out her/his e-learning activity.

X-Learn is characterized by the following features that, in our opinion, are extremely relevant for a new e-learning system:

- *It is highly subjective*; indeed, it handles quite a rich and detailed user profile which records her/his background knowledge and future learning objectives and, consequently, plays a key role in the definition of learning programs.
- *It is dynamic and flexible* since it is provided with mechanisms for reacting to variations of both user and organization exigencies and objectives.
- *It is device adaptive* since it decides the typology (in particular, the “multi-media degree”) of learning objects to present to the user on the basis of the device she/he is currently exploiting.
- *It is generic*, i.e., it is capable of operating on a large variety of learning contexts.
- *It is XML-based*, since (i) the agent ontologies are stored as XML documents; (ii) the communication language exploited by the various agents is ACML [9], a language obtained by combining XML and KQML [7]; (iii) the extraction of information from the various data structures is carried out by means of *XQuery* [4]; (iv) the manipulation of agent ontologies is performed by means of the Document Object Model (DOM) [1]; (v) information relative to the learning activities is represented and handled by means of the IMS standard [3] (see above).

This paper is organized as follows: the next section presents some preliminary definitions; a detailed description of all agents involved in *X-Learn* is provided in Section 3. Section 4 is devoted to describe a series of experiments we have performed for testing our system performances. In Section 5 we present related literature and compare *X-Learn* with various other systems already proposed in the past. Finally, in Section 6, we draw our conclusions.

2 Preliminaries

In this section we provide some preliminary definitions necessary to understand both the architecture and the behaviour of *X-Learn*.

Definition 1. A *skill* indicates an ability that a user wants to achieve. Examples of skills are “C++ programmer”, “Webmaster”, etc. Each skill requires the knowledge of a set of subjects. We say that a user acquires a skill when she/he knows all the subjects associated with it.

Definition 2. A *subject* denotes a high level topic of a skill. Examples of subjects are “C++ functions”, “C++ Classes”, “C++ Class Inheritance”, etc. Each subject may have one or more pre-requisites; these are other subjects whose knowledge is necessary for studying it. As an example, in order to study the subject “C++ Class Inheritance”, it is necessary to know the subject “C++ Classes”. Analogously, a subject can be a pre-requisite for one or more subjects. We say that a subject is *basic* if it has no pre-requisites.

Definition 3. A *learning object* is an elementary learning unit relative to a specific subject. In this paper we assume that:

- each learning object is relative to only one subject;
- various learning objects could be associated with the same subject; they could differ for the associated learning methodology, for their multimedia degree, and so on. However, all learning objects associated with the same subject are considered equivalent from a didactic point of view.

A learning object consists of two components, namely the *learning object descriptor* and the *learning object content*. The former describes the characteristics of the learning object (e.g., the associated subject, the multimedia format, etc.). The latter corresponds to the actual information content associated with the learning object and that the user must study for learning the subject associated with it.

As previously mentioned, subjects can be characterized by some pre-requisites which are, in their turn, other subjects. As a consequence, a user can study a subject only if she/he knows all the corresponding pre-requisites. We have seen that studying a subject corresponds to study one of the learning objects associated with it. As a consequence, it is possible to introduce the concept of learning program which allows to formally define the (partially ordered) set of learning objects that a user must study for learning a subject starting from her/his background knowledge.

Definition 4. A *learning program* LP is a set of pairs of learning objects ($LObj_s$, $LObj_t$) such that $LObj_t$ can be studied only after $LObj_s$ or, in other words, such that the subject associated with $LObj_s$ is a pre-requisite of the subject relative to $LObj_t$.

Note that, in LP , more tuples $(LObj_{s_1}, LObj_t)$, $(LObj_{s_2}, LObj_t)$, $\dots$, $(LObj_{s_n}, LObj_t)$ could exist having $LObj_t$ as their second component; this indicates that $LObj_t$ can be studied only after $LObj_{s_1}, LObj_{s_2}, \dots, LObj_{s_n}$ have been learned. In this way, LP specifies also a partial order according to which the learning objects must be studied.

3 The X-Learn Architecture

3.1 General Overview

X-Learn consists of three agent typologies, namely:

- a *User-Device Agent* (hereafter *UDA*), that handles an e-learning session carried out by a user U by means of a device D ;
- a *Skill Manager Agent*, (hereafter *SMA*), that supports a user to determine the skills of her/his interest, as well as the subjects she/he has to study for attaining a given skill, on the basis of her/his background knowledge;

- a *Learning Program Agent*, (hereafter *LPA*), that generates personalized learning programs for a specific user *U* needing to study a particular subject *S*, having a certain background knowledge and exploiting a device *D* for her/his e-learning activity.

In addition, *X-Learn* is provided with a Learning Object Repository (*LOR*), storing all learning objects it handles.

As previously pointed out, the role of XML in *X-Learn* is crucial. Indeed:

- The agent ontologies are stored as XML documents; as a consequence, they are light, versatile, easy to be exchanged and can reside on different devices and software platforms. In spite of this simplicity, the information representation rules embodied in XML are powerful enough to allow a sophisticated information management.
- The agent communication language is ACML [9]; this is the XML encoding of FIPA Agent Communication Language [8]. The exploitation of ACML guarantees various benefits to *X-Learn*; two of the most relevant ones are the following:
 - Developing and managing tools capable of carrying out ACML message parsing is extremely simple; indeed, these tools can be constructed by exploiting the numerous off-the-shelf XML parsers available over the Internet. Vice versa, in order to construct parsers for not XML-based ACL versions, it is generally necessary to exploit a Lisp-like encoding (see [9] for all details) whose supports are more difficult to be found over the Internet.
 - Integrating Agents with a large variety of Web technologies (such as Secure Socket Layer - SSL, for handling both the authentication of agents' identities and the encryption of ACL messages) is very simple to be realized. Vice versa, addressing the same issues with a not XML-based Agent Communication Language would imply heavy constraints on the agent infrastructure (think, for example, to the great overload to be put in the ACL messages for handling these issues).
- The extraction of information from the various data structures is carried out by means of XQuery [4]. This is becoming the standard query language for the XML environment. Since it is based on the XML framework, XQuery can handle a large data variety. It has capabilities typical of database query languages as well as features typical of document management systems. Finally, it is provided with various high level constructs for simplifying querying over the Web; among them, we cite *constructors*, that allow the creation of XML structures within a query, and *FLWR expressions*, that support iteration and variable binding.
- The manipulation of agent ontologies is performed by means of the Document Object Model (DOM) [1]. This is a platform- and language-neutral interface that allows programs and scripts to dynamically access and update the content, structure and style of XML documents. DOM makes it possible for programmers to write applications working properly on all browsers and servers as well as on a large variety of hardware and software platforms.

DP_i	DId_i	the <i>Profile of the Device</i> D_i
	$BMax_i$	the <i>Identifier</i> of D_i
	VE_i	the <i>Maximum Bandwidth</i> that D_i can guarantee for accessing or downloading data from the network
	AE_i	the <i>Video Enabled</i> field of D_i . It is set to 1 if D_i supports video data format, 0 otherwise
	TE_i	the <i>Audio Enabled</i> field of D_i . It is analogous to VE_i but for audio
UP_j		the <i>Text Enabled</i> field of D_i . It is analogous to VE_i but for text
	UId_j	the <i>Profile of the User</i> U_j
	$DesSkill_j$	the <i>Identifier</i> of U_j
	$AcqSkillSet_j$	the <i>Desired Skill</i> of U_j (i.e., the skill U_j wants to acquire)
	$KnownSubjSet_j$	the <i>Acquired Skill Set</i> of U_j
	$MaxTime_j$	the <i>Known Subject Set</i> of U_j . A subject $KnownSubj_{j_l}$ of $KnownSubjSet_j$ has an identifier $SubjId_{j_l}$ and a name $SubjName_{j_l}$
		the <i>Maximum Time</i> U_j can spend for a learning program

Table 1. The Ontology of UDA_{ij}

- Learning Object Metadata are represented and handled by means of the IMS standard [3]. As pointed out in the Introduction, such a standard describes learning objects by means of XML documents, validated with respect to an XML Schema. The exploitation of XML allows to manipulate and manage learning object descriptors using the most recent XML technologies such as DOM, for data manipulation, SAX, for data parsing, XQuery, for data querying, and so on.

In the following subsections we provide a detailed description of the various agent typologies which *X-Learn* consists of.

3.2 The User-Device Agent

A User-Device Agent UDA_{ij} is associated with a user U_j exploiting a device D_i ; it supports U_j during her/his learning activities carried out by means of D_i .

Ontology The ontology of UDA_{ij} consists of a pair $\langle DP_i, UP_j \rangle$, where:

- DP_i , the Device Profile of D_i , stores some characteristics of D_i such as the maximum bandwidth and the medium typology (e.g., video, audio, etc.) it can handle;
- UP_j , the User Profile of U_j , stores some characteristics of U_j such as the skill she/he wants to acquire, her/his background knowledge and the maximum time she/he can spend for a learning program.

Table 1 illustrates the parameters characterizing the ontology of UDA_{ij} in more detail. The corresponding XML Schema is shown in Figure 1.

Behaviour UDA_{ij} is activated by U_j when she/he wants to acquire a new skill. In this case UDA_{ij} contacts *SMA* and sends it the set of skills already acquired

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <!-- Definition of attributes -->
  <xs:attribute name="SubjId" type="xs:ID"/>
  <xs:attribute name="SubjName" type="xs:string"/>
  <xs:attribute name="DId" type="xs:ID"/>
  <xs:attribute name="BMax" type="xs:float"/>
  <xs:attribute name="VE" type="xs:integer"/>
  <xs:attribute name="AE" type="xs:integer"/>
  <xs:attribute name="TE" type="xs:integer"/>
  <xs:attribute name="UID" type="xs:ID"/>
  <xs:attribute name="DesSkill" type="xs:string"/>
  <xs:attribute name="MaxTime" type="xs:float"/>
  <!-- Definition of simple elements -->
  <xs:element name="AcqSkill" type="xs:string"/>
  <!-- Definition of complex elements -->
  <xs:element name="Subj">
    <xs:complexType>
      <xs:attribute ref="SubjId" use="required"/>
      <xs:attribute ref="SubjName" use="required"/>
    </xs:complexType>
  </xs:element>
  <xs:element name="AcqSkillSet">
    <xs:complexType>
      <xs:sequence>
        <xs:element ref="AcqSkill" minOccurs="0"
          maxOccurs="unbounded"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="KnownSubjSet">
    <xs:complexType>
      <xs:sequence>
        <xs:element ref="KnownSubj" minOccurs="0"
          maxOccurs="unbounded"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="DP">
    <xs:complexType>
      <xs:sequence>
        <xs:element ref="DId" use="required"/>
        <xs:element ref="BMax" use="required"/>
        <xs:element ref="VE" use="required"/>
        <xs:element ref="AE" use="required"/>
        <xs:element ref="TE" use="required"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="UP">
    <xs:complexType>
      <xs:sequence>
        <xs:element ref="AcqSkillSet"/>
        <xs:element ref="KnownSubjSet"/>
      </xs:sequence>
      <xs:attribute ref="UID" use="required"/>
      <xs:attribute ref="DesSkill" use="required"/>
      <xs:attribute ref="MaxTime" use="required"/>
    </xs:complexType>
  </xs:element>
  <xs:element name="UDAOntology">
    <xs:complexType>
      <xs:sequence>
        <xs:element ref="DP"/>
        <xs:element ref="UP"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

Fig. 1. The XML Schema of *UDA*

by U_j . In its turn, *SMA* sends UDA_{ij} the list of skills U_j might acquire; these are shown to U_j who can select one of them. When this happens, UDA_{ij} adds the selected skill to UP_j and the learning session starts. In order to illustrate the exploitation of ACML, in Figure 2 we show the ACML message that UDA_{ij} sends to *SMA*. In the following, due to space limitations, we cannot present the other ACML messages exchanged by the various agents; however, they are analogous to that shown in Figure 2.

UDA_{ij} can be activated by U_j also when she/he wants to continue a previously interrupted learning program. In this case UDA_{ij} exploits information stored in its ontology for re-starting the learning program.

A learning session is carried out as follows. UDA_{ij} sends to *SMA* both the set of subjects already known by U_j and the skill she/he desires to acquire. *SMA* identifies the subjects U_j must attain for acquiring the desired skill and returns an ordered list of them to UDA_{ij} . The list order reflects the pre-requisite relationships existing among subjects. At this point, U_j can choose the next subject to learn.

After this, UDA_{ij} contacts *LPA* and sends it the device profile DP_i , the user profile UP_j and the subject $Subj_k$ that U_j desires to learn. *LPA* determines the Best Learning Program BLP_{ijk} allowing U_j to learn $Subj_k$ by means of D_i and sends it to UDA_{ij} (see Section 3.4). This extracts each learning object of BLP_{ijk} from the Learning Object Repository and presents it to U_j . When she/he ends to study a learning object of BLP_{ijk} , UDA_{ij} updates UP_j by adding the corresponding subject to the set of subjects already known by U_j .

```

<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE fipa_acl SYSTEM "fipa_acl.dtd">
<message>
  <messagetype>
    request
  </messagetype>
  <messageparameter>
    <sender link="http://www.ing.unirc.it/user">
      UDA
    </sender>
  </messageparameter>
  <messageparameter>
    <receiver link="http://www.mat.unical.it/X-learn">
      SMA
    </receiver>
  </messageparameter>
  <messageparameter>
    <ontology link="http://www.ing.unirc.it/user/UDAontology.xml">
      Ontology of UDA
    </ontology>
  </messageparameter>
  <messageparameter>
    <content>
      Request of available skills
    </content>
  </messageparameter>
  <messageparameter>
    <reply-with>
      List of skills
    </reply-with>
  </messageparameter>
</message>

```

Fig. 2. The ACML message that *UDA* sends to *SMA*

After U_j has studied all learning objects of BLP_{ijk} , and, consequently, has acquired $Subj_k$, she/he can decide to interrupt the learning session or, alternatively, to continue it by studying a further subject relative to the current Desired Skill. In the former case, UDA_{ij} is de-activated; in the latter case, it contacts *LPA* for determining the new learning program.

Finally, when U_j knows all subjects associated with the current Desired Skill, UDA_{ij} updates UP_j by adding it to the set of acquired skills.

3.3 The Skill Manager Agent

A Skill Manager Agent *SMA* supports User-Device Agents in the selection of skills and subjects to be learned by the corresponding users.

Ontology The ontology of *SMA* consists of a set of skills $SkillSet = \{Sk_1, \dots, Sk_q\}$. Each skill Sk_l is characterized by a name $SkName_l$ and the list $SkSubjList_l$ of subjects to be learned for attaining it. Subjects in $SkSubjList_l$ are ordered on the basis of the pre-requisite relationships existing among them. The XML Schema associated with this ontology is analogous to that relative to the ontology of UDA_{ij} ; due to space limitations we do not show it.

Behaviour *SMA* is activated by a User-Device Agent UDA_{ij} when U_j wants to choose a new skill to acquire or when she/he wants to learn a new subject relative to her/his current Desired Skill.

In the former case, *SMA* receives from UDA_{ij} the set of skills attained by U_j in the past and returns to UDA_{ij} the skills present in *X-Learn* not yet acquired by U_j . The query for skill extraction, expressed in XQuery, is shown in Figure 3.

In the latter case, *SMA* receives from UDA_{ij} the set of subjects U_j already knows and the skill she/he desires to acquire; it selects from its ontology the list of subjects necessary to be learned for attaining the current desired skill of U_j , filters out those already known by U_j and returns the remaining ones to UDA_{ij} . The associated query is illustrated in Figure 4.

```
<SkillSet>
  for $i in document("http://www.mat.unical.it/X-learn/SMAOntology.xml")/*Skill
  where empty (document("http://www.ing.unirc.it/user/UDAOntology.xml")
    /*AcqSkillSet [AcqSkill eq $i/@Name]
  return
    <Skill>
      $i/@Name
    </Skill>
</SkillSet>
```

Fig. 3. The query *SMA* executes for selecting the skills present in *X-Learn* and not yet acquired by U_j

```
<SubjectSet>
  let $uda:=document("http://www.ing.unirc.it/user/UDAOntology.xml")
  let $skill:=document("http://www.mat.unical.it/X-learn/SMAOntology.xml")
    /*Skill[Name eq $uda/*/@DesSkill]

  for $subject in $skill/SkSubjList/Subject
  where empty ($uda/*/@KnownSubjSet [Subj/@Name eq $subject])
  return
    <Subject>
      $subject
    </Subject>
</SubjectSet>
```

Fig. 4. The query *SMA* executes for selecting the list of subjects of the current desired skill not already known by U_j

3.4 The Learning Program Agent

The Learning Program Agent *LPA* is activated by a User-Device Agent UDA_{ij} whenever U_j wants to study a new subject $Subj_k$. It is in charge of providing U_j with a personalized learning program for studying $Subj_k$ on the basis of

<i>SubjSet</i>		the <i>Set of Subjects</i> currently available in <i>X-Learn</i>
$Subj_l \in SubjSet$	<i>SubjId_l</i> <i>SubjName_l</i> <i>SubjPrereqSet_l</i> <i>SubjLObjSet_l</i>	the <i>Identifier</i> of <i>Subj_l</i> the <i>Name</i> of <i>Subj_l</i> the <i>Set of Pre-requisites</i> of <i>Subj_l</i> the <i>Set of learning objects</i> relative to <i>Subj_l</i>
<i>LObjSet</i>		the <i>Set of learning objects</i> currently available at the e-learning system
$LObj_m \in LObjSet$	<i>LObjId_m</i> <i>LObjName_m</i> <i>LObjSubject_m</i> <i>LObjLocation_m</i> <i>LObjVC_m</i> <i>LObjAC_m</i> <i>LObjTC_m</i> <i>LObjSize_m</i> <i>LObjDuration_m</i>	the <i>Identifier</i> of <i>LObj_m</i> the <i>Name</i> of <i>LObj_m</i> the <i>Subject</i> which <i>LObj_m</i> refers to the <i>URI</i> where <i>LObj_m</i> can be accessed the <i>Video Component</i> field of <i>LObj_m</i> . It is set to 1 if <i>LObj_m</i> has a video component, 0 otherwise the <i>Audio Component</i> field of <i>LObj_m</i> . It is analogous to <i>LObjVC_m</i> but for audio the <i>Text Component</i> field of <i>LObj_m</i> . It is analogous to <i>LObjVC_m</i> but for text the <i>Size</i> , in bytes, of <i>LObj_m</i> the <i>Duration</i> of <i>LObj_m</i> . It is defined as the time, in seconds, that <i>LObj_m</i> takes when it is played

Table 2. The Ontology of *LPA*

her/his background knowledge and the characteristics of the device D_i she/he is currently exploiting.

Ontology The ontology of *LPA* consists of a pair $\langle SubjSet, LObjSet \rangle$, where:

- *SubjSet* represents the set of subjects currently available in *X-Learn*. Each subject is characterized by a code, a name, the set of its pre-requisites and the set of learning objects associated with it.
- *LObjSet* is the set of learning objects currently present in *X-Learn*. Each learning object is characterized by an identifier, a name, the subject it refers to¹, the URI where it can be accessed, its data format, size and duration. Metadata for describing learning objects have been defined according to IMS specifications [3]. Table 2 illustrates the parameters characterizing the ontology of *LPA* in more detail. The corresponding XML Schema is analogous to that relative to the ontologies of *UDA_{ij}* and *SMA*; due to space limitations we do not show it.

Behaviour *LPA* is activated by *UDA_{ij}* whenever a user U_j wants to study a subject $Subj_k$ by means of a device D_i . *LPA* receives $Subj_k$, UP_j and DP_i from *UDA_{ij}*. It returns to *UDA_{ij}* the Best Learning Program BLP_{ijk} allowing U_j to study $Subj_k$ by means of D_i . The construction of BLP_{ijk} consists mainly of three steps.

¹ Recall that a learning object is related to only one subject but one subject might have various learning objects associated with it.

Step 1 During the first step *LPA* constructs a support graph, named *Subject Dependency Graph* $SDG_{jk} = \langle NS_{jk}, AS_{jk} \rangle$. SDG_{jk} is constructed for guiding U_j to learn $Subj_k$ starting from basic and/or already known subjects.

As a consequence, for each list of subjects $\{Subj_1, Subj_2, \dots, Subj_n\}$, such that:

- $Subj_l$ is a pre-requisite of $Subj_{l+1}$, $1 \leq l \leq n - 1$;
- $Subj_1, \dots, Subj_n$ are not known by U_j ;
- $Subj_1$ is either a basic subject or a subject whose pre-requisites are already known by U_j ;
- $Subj_n = Subj_k$.

$Subj_1, \dots, Subj_n$ are added to NS_{jk} ² and arcs $(Subj_1, Subj_2), \dots, (Subj_{n-1}, Subj_n)$ are added to AS_{jk} , if not already present.

Step 2 During the second step *LPA* exploits SDG_{jk} for determining the Best Learning Program BLP_{ijk} . Such a task is carried out by suitably selecting a learning object for each subject in SDG_{jk} . The learning object selection is performed according to the following guidelines:

- U_j should exploit as much available bandwidth as possible. The available bandwidth for U_j is determined by computing the minimum between the bandwidth $BMax_i$ guaranteed by D_i and the bandwidth $BNet_j$ available on the network for U_j . The bandwidth required by each learning object is computed as the ratio between its size and its duration.
- The time required to U_j to learn BLP_{ijk} must be lower than $MaxTime_j$, i.e., the maximum time U_j can spend for a learning program.
- The format of each selected learning object must be compatible with the characteristics of D_i .
- In BLP_{ijk} exactly one learning object must be selected for each subject of SDG_{jk} .

The construction of BLP_{ijk} can be properly formulated as the following optimization problem:

$$\begin{aligned}
& \text{maximize} \quad \sum_{r=1}^{|NS_{jk}|} \sum_{s=1}^{|SubjLObjSet_r|} \frac{LObjSize_{r_s}}{LObjDuration_{r_s}} x_{r_s} \\
& \text{s.t.} \quad \frac{LObjSize_{r_s}}{LObjDuration_{r_s}} x_{r_s} \leq \min\{BMax_i, BNet_j\} \\
& \quad \sum_{r=1}^{|NS_{jk}|} \sum_{s=1}^{|SubjLObjSet_r|} LObjDuration_{r_s} x_{r_s} \leq MaxTime_j \\
& \quad \sum_{s=1}^{|SubjLObjSet_r|} LObjVC_{r_s} x_{r_s} \leq VE_i, \quad 1 \leq r \leq |NS_{jk}| \\
& \quad \sum_{s=1}^{|SubjLObjSet_r|} LObjAC_{r_s} x_{r_s} \leq AE_i, \quad 1 \leq r \leq |NS_{jk}| \\
& \quad \sum_{s=1}^{|SubjLObjSet_r|} LObjTC_{r_s} x_{r_s} \leq TE_i, \quad 1 \leq r \leq |NS_{jk}| \\
& \quad \sum_{s=1}^{|SubjLObjSet_r|} x_{r_s} = 1, \quad 1 \leq r \leq |NS_{jk}| \\
& \quad x_{r_s} \in \{0, 1\}
\end{aligned}$$

Here, the variable x_{r_s} represents the learning object $LObj_s$ associated with the subject $Subj_r$. $x_{r_s} = 1$ if $LObj_s$ belongs to BLP_{ijk} .

² In the following we shall use the same name for indicating both a subject and the associated node in SDG_{jk} , when this is not confusing.

Step 3 During the third step *LPA* simply returns BLP_{ijk} to UDA_{ij} .

4 Experiments

We have carried out various experiments for verifying the performances of *X-Learn*. Most of these experiments have been conceived for verifying the capability of our system to adapt its behaviour to both bandwidth availabilities and the characteristics of the devices exploited by users.

In these experiments, 72% of learning objects *available* at the Learning Object Repository of *X-Learn* had a text component, 72% of them had an audio component and, finally, 72% of them had a video component³.

A first experiment has been performed for measuring the fraction of *selected* learning objects having a text (resp., an audio, a video) component. Before carrying out the experiment we thought that, if the available bandwidth increases, the fraction of selected learning objects having an audio and/or a video component increases as well, whereas the percentage of selected learning objects having a text component should be quite constant and high.

The results we have obtained for this experiment are shown in Figure 5. They confirm our intuition. Indeed, it is possible to observe that:

- The fraction of *selected* learning objects having a text component is quite constant and high; indeed, it is always greater than 80%.
- The percentage of *selected* learning objects having an audio component slightly increases when the bandwidth increases; it is quite high, since it is always greater than 60%.
- In presence of a bandwidth increase, the increase of the fraction of *selected* learning objects having a video component is enormous and rapid.

A second experiment has been carried out for verifying how the selection of learning objects depends on the device exploited by the user. In this experiment, the set of available learning objects is the same as that taken into account in the previous one.

We have considered four device typologies handling (i) text and audio, (ii) text and video, (iii) audio and video, (iv) text, audio and video. In addition, we have considered three situations for bandwidth availability, namely (a) low bandwidth (i.e., 9-10 kbytes/s), (b) medium bandwidth (i.e., 50-60 kbytes/s), (c) high bandwidth (i.e., over 120 kbytes/s).

Results obtained when the available bandwidth is low are shown in Table 3. In this table there is a row for each device typology; columns are associated with text, audio and video. The element corresponding to the row “Text and Audio” and to the column “Audio” specifies the fraction of learning objects, having an audio component, which are selected if a device handling only text and audio is exploited. Observe that, in case of a low bandwidth, if the device

³ Remember that a learning object might contemporarily have a text, an audio and a video component.

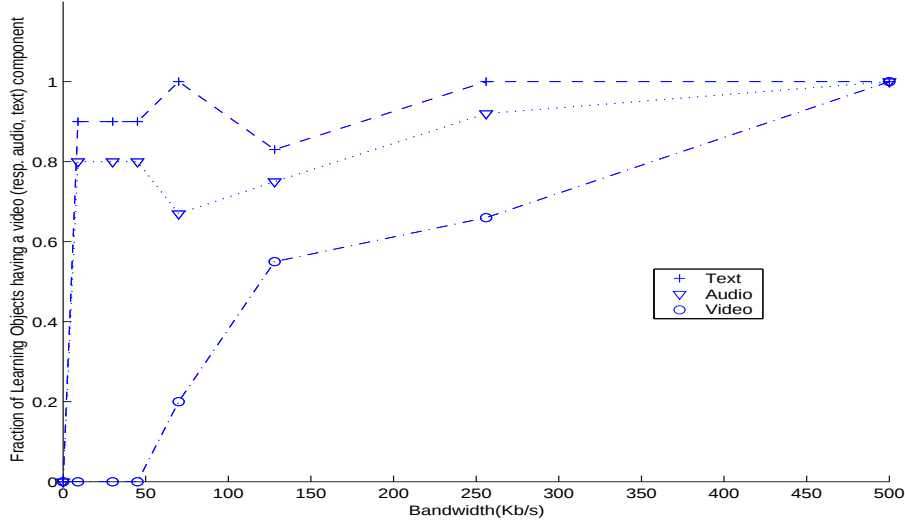


Fig. 5. Variation of the fraction of selected learning objects having a video (resp., audio, text) component against the variation of available bandwidth

can handle text and audio (resp., video), text is preferred to audio (resp., video). Analogously, if the device can handle video and audio, audio is preferred to video. Finally, if the device can handle text, audio and video, video is totally filtered out, audio is partially considered whereas text is generally selected. These results are reasonable if we consider that, in this experiment, available bandwidth is low and video components generally require a high bandwidth.

	<i>Text</i>	<i>Audio</i>	<i>Video</i>
<i>Text and Audio</i>	0.85	0.60	0.00
<i>Text and Video</i>	1.00	0.00	0.00
<i>Audio and Video</i>	0.00	1.00	0.00
<i>Text, Audio and Video</i>	0.85	0.60	0.00

Table 3. Results returned when the bandwidth is low

Results returned when the available bandwidth is medium are reported in Table 4. Observe that, since available bandwidth is higher w.r.t. the previous case, the fraction of selected learning objects having an audio and/or a video component is higher than that returned previously.

Results obtained in presence of a high bandwidth are shown in Table 5. In this case, when the device is capable of handling text and audio, all selected learning objects have both a text and an audio component. This is justified by considering

	<i>Text</i>	<i>Audio</i>	<i>Video</i>
<i>Text and Audio</i>	1.00	0.80	0.00
<i>Text and Video</i>	1.00	0.00	0.26
<i>Audio and Video</i>	0.00	0.65	0.18
<i>Text, Audio and Video</i>	1.00	0.60	0.20

Table 4. Results returned when the bandwidth is medium

that both text and audio require quite a limited bandwidth. When the device handles both video and audio, generally, audio is preferred to video even if a high percentage of selected learning objects have also a video component. Finally, when the device handles text, audio and video, a large fraction of selected learning objects has also an audio and/or a video component.

	<i>Text</i>	<i>Audio</i>	<i>Video</i>
<i>Text and Audio</i>	1.00	1.00	0.00
<i>Text and Video</i>	1.00	0.00	0.75
<i>Audio and Video</i>	0.00	0.95	0.65
<i>Text, Audio and Video</i>	1.00	0.90	0.65

Table 5. Results returned when the bandwidth is high

5 Related Literature

The convergence of mobile communications and handheld computers offers new interesting opportunities in e-learning activities; in this section we focus on some adaptive e-learning systems and we try to highlight their similarities and differences w.r.t our approach. More details on adaptive e-learning systems can be found in [5].

In [12] the authors propose an handheld learning device and an appropriate software infrastructure to support children education. The main components of the proposed architecture are: *(i) a learning manager*, which stores a local cache of learning objects extracted by a repository and exploits specific software agents to search and organize learning objects, *(ii) a communication manager*, which creates direct voice and data communication channels for disseminating learning materials and handles resource sharing.

Similarly to *X-Learn*, [12] develops a technology for assisting individuals and groups to *learn anytime* and *anywhere*; in addition, in both the approaches, learning materials follow the IMS standard and might have different multimedia formats. In spite of these similarities, the approach of [12] and *X-Learn* appear

complementary; indeed, in [12], the authors modify an existing handheld device to support learning activities whereas *X-Learn* adapts the learning objects distribution to the device characteristics.

In [10] a multi-agent prototype called *CITS* (Confidence Intelligent Tutoring Agent) is proposed. *CITS* approach aims at being *adaptive* (i.e., it can adjust learning materials to meet user needs) and *dynamic* (i.e., it adapts the offered service to user current behaviour). *CITS* architecture consists of five kinds of agents, namely: (i) a *Cognitive Agent*, that creates a model for each learner, representing her/his level and learning style; (ii) a *Behaviour Agent*, that monitors learner behaviour during her/his interaction with the system for improving the model produced by the Cognitive Agent; (iii) a *Guide Agent*, that selects and classifies information potentially useful for the learner; (iv) an *Information Agent*, that searches over the Internet for extra information required by the learner and, (v) a *Confidence Agent*, that is in charge of strengthening the confidence between the learner and the system. In *CITS* learning information is fragmented in simple pieces called *knowledge targets*; these might have different multimedia formats.

Both *CITS* and *X-Learn* are XML-based multi-agent systems and both of them support the dissemination of learning materials having different multimedia formats. The main differences existing between them are the following: (i) *CITS* knowledge targets and *X-Learn* learning objects are different in their characteristics and purposes; (ii) *CITS* offers more “freedom degrees” in the learning program definition; (iii) *CITS* does not support device adaptivity.

[6] proposes a device-aware e-learning system as a part of a more complex e-learning platform, named *KnowledgeSea*. The core of the system proposed in [6] is a *self-organized hyperspace map*, i.e. an automatically-built map that provides a concise navigation support for a relatively large learning hyperspace. The map may help a user to find and access on-line educational resources by means of mobile wireless devices.

The approach of [6] is quite similar to *X-Learn*; indeed, both of them take into account the device a user is exploiting for accessing educational resources. The main differences existing between them are the following: (i) the self-organized hyperspace map provides a more flexible mechanism for selecting learning objects; however, it does not handle pre-requisite relationships possibly existing among learning objects; (ii) [6] does not handle the construction of a complete learning program; vice versa, in *X-Learn*, *LPA* has been conceived exactly for this purpose.

In [11] the authors propose *IDEAL* (Intelligent Distributed Environment for Active Learning), a multi-agent system for *active distance learning*. *IDEAL* consists of: (i) a *personal agent*, handling the profile (i.e., the background knowledge, the interests and the learning style) of a learner; (ii) a *course agent*, managing both the materials and the teaching technique of a course; (iii) a *teaching agent*, behaving as an intelligent tutor for a learner. In *IDEAL*, course materials are decomposed into small components called *Lecturelets*. These are XML documents

containing JAVA code; they are dynamically assembled to cover course topics according to learner progress.

IDEAL and *X-Learn* share various similarities; indeed, both of them are XML based and exploit user modeling techniques. The main differences existing between them are the following: (i) the *Curriculum Sequencing Activity* of *IDEAL* and the *Best Learning Program* construction of *X-Learn* are based on different philosophies and strategies; (ii) *IDEAL* exploits non-standard and complex constructs for managing course contents (i.e. LectureLets) whereas *X-Learn* uses the concept of learning object, derived from IMS standard.

In [15] an approach for exploiting *web-mining* techniques to build a software agent supporting e-learning activities is presented. The proposed agent acts as a recommender system, i.e. it can produce both *suggestions* (helping the learner to better navigate through on-line materials) and *shortcuts* (helping the learner to quickly find needed resources). In order to perform all these activities, the system intensively exploits a user profile taking into account learner access history. *X-Learn* and [15] share some important features; in particular, both of them exploit a user profile and operate by constructing the most appropriate learning program. The main differences existing between *X-Learn* and [15] are the following: (i) [15] is a *single-agent* architecture whereas our approach is *multi-agent*; (ii) the learning program construction is based on data mining techniques in [15], whereas is performed by means of graph-based strategies in *X-Learn*.

In [13] the system *ELETROTUTOR* is proposed; this is a multi-agent system implemented on a JADE platform. *ELETROTUTOR* consists of the following agents: (i) a *Pedagogical Agent*, performing learning activities, such as the distribution and the dissemination of examples and exercises; (ii) a *Remote Agent*, managing the communication between the learner and the system; (iii) a *Communication Agent*, handling agent communications, and (iv) a *Student Model Agent*, handling a student profile and exploiting it for performing the learning activities. Both *X-Learn* and *ELETROTUTOR* are *multi-agent systems* and both of them adapt the dissemination of learning contents to user profiles. As for differences between *ELETROTUTOR* and *X-Learn*, we observe that the former does not handle device adaptivity and multimedia information that are, instead, managed by the latter.

6 Conclusions

In this paper we have proposed *X-Learn*, an XML-based multi-agent system for supporting e-learning activities.

We have seen that, in *X-Learn*, three typologies of agents are present, namely (i) a *User-Device Agent*, that handles an e-learning session carried out by a user *U* by means of a device *D*; (ii) a *Skill Manager Agent*, that supports a user *U* to determine the skills and the subjects she/he has to study; (iii) a *Learning Program Agent*, that generates personalized learning programs for a specific user *U* needing to study a particular subject *S*, having a certain background knowledge and exploiting a device *D* for her/his learning activities.

We have shown that *X-Learn* is adaptive w.r.t. the profile of both the customer and the device she/he is exploiting for carrying out the learning activities. Finally, we have seen that it is XML-based since: (i) the agent ontologies are stored as XML documents; (ii) the communication language exploited by the various agents is ACML; (iii) the extraction of information from the various data structures is carried out by means of XQuery; (iv) the manipulation of agent ontologies is performed by means of DOM; (v) learning objects are represented and handled by means of IMS standard.

As for future work, we plan to study the possibility to enrich the proposed multi-agent model with other features capable of improving its effectiveness and completeness in supporting a large variety of activities related to e-learning. As an example, it might be interesting to define various learning strategies to allow a user to specify the preferred learning strategy and, finally, to consider such a preference when the Best Learning Program is constructed.

As a second improvement, particularly interesting when *X-Learn* is exploited for managing employee learning in an organization, it could be possible to define career paths for the various employees and to relate learning programs with them.

As a final extension, it could be possible to provide *X-Learn* with a team building functionality capable of assigning employees to project teams on the basis of the skills acquired during e-learning activities.

References

1. Document Object Model. <http://www.w3.org/DOM/>.
2. IEEE Learning Technology Standards Committee. LOM working draft. <http://ltsc.ieee.org/wg12/index.html>.
3. Instructional Management System. <http://www.imsproject.org>.
4. World Wide Web Consortium - XML query. <http://www.w3.org/XML/Query>.
5. P. Brusilovsky. Adaptive and intelligent technologies for Web-based education. *Kunstliche Intelligenz-Special Issue on Intelligent Systems and Teleteaching*, 13(4):19–25, 1999.
6. P. Brusilovsky and R. Rizzo. Accessing Web educational resources from mobile wireless devices. In *Proc. of the International Workshop on Mobile Personal Information Retrieval*, pages 23–31, Tampere, Finland, 2002. ACM Press.
7. T.W. Finin, R. Fritzon, D. McKay, and R. McEntire. KQML as an agent communication language. In *Proc. of the ACM International Conference on Information and Knowledge Management (CIKM'94)*, pages 456–463, Gaithersburg, Maryland, USA, 1994. ACM Press.
8. FIPA. Foundation for Intelligent Physical Agents Specifications. <http://www.fipa.org>.
9. B. Grosz and Y. Labrou. An approach to using XML and a rule-based content language with an agent communication language. In *Proc. of the IJCAI-99 Workshop on Agent Communication Language*, pages 96–117, Stockholm, Sweden, 1999.
10. M.A. Razeq, C. Frasson, and M. Kaltenbach. Toward more effective intelligent distance learning environments. In *Proc. of the International Conference on Machine Learning and Applications (ICMLA'02)*, pages 187–193, Las Vegas, Nevada, USA, 2002. CSREA Press.

11. Y. Shang, H. Shi, and S. Chen. An intelligent distributed environment for active learning. In *Proc. of the ACM International Conference on World Wide Web (WWW 2001)*, pages 308–315, Hong Kong, 2001. ACM Press.
12. M. Sharples, D. Corlett, and O. Westmancott. The design and implementation of a mobile learning resource. *Personal and Ubiquitous Computing*, 6(3):220–234, 2002.
13. R.A. Silveira and R.M. Vicari. Improving interactivity in e-learning systems with multi-agent architecture. In *Proc. of the International Conference on Adaptive Hypermedia and Adaptive Web-Based Systems (AH 2002)*, pages 466–471, Malaga, Spain, 2002. Lecture Notes in Computer Science, Springer.
14. D. Wiley. Peer-to-Peer and Learning Objects: The New Potential for Collaborative Constructivist Learning Online. In *Proc. of the IEEE International Conference on Advanced Learning Technology: Issues, Achievements and Challenges (ICALT 2001)*, pages 494–498, Madison, Wisconsin, USA, 2001. IEEE Computer Society.
15. O.R. Zaiane. Building a recommender agent for e-learning systems. In *Proc. of the International Conference on Computers in Education (ICCE 2002)*, pages 55–59, Auckland, New Zealand, 2002. IEEE Press.